


SNVR-041H5 (SNVR-E0104)  
4 CH NETWORK VIDEO RECORDER (4K)



### Product Highlights


- 4 ch IP Camera Input
- Third Party IP cameras Supported with ONVIF Conformance
- Supports H.265/H.264 Video Formats
- Supports 8 Megapixels Resolution Recording
- Supports 1 ch-HDMI and 1 ch-VGA
- HDMI & VGA Simultaneous Output
- I/O Bandwidth: 40/64Mbps
- Supports 1 SATA upto 8 TB
- Supports Cloud upgrade



## Specifications

<b>Model Number</b>	<b>SNVR-041H5 (SNVR-E0104)</b>
<b>System</b>	
Operating System	Embedded Linux
<b>Audio &amp; Video</b>	
IP Camera Input	4 ch
Two Way Talk	1ch , RCA
<b>Display</b>	
Interface	HDMI: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz
Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Multi Screen Display	1/4
OSD Menu	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
<b>Video Detection &amp; Alarm</b>	
Trigger Events	Recording, PTZ, Tour, Alarm Out, Video Push, Email, Snapshot, Buzzer and Screen Tips
Video Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking
Alarm Input	4
Relay Output	1
<b>Recording</b>	
Compression	H.265, H.264
Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Bitrate	128 16384 Kbps
<b>Playback &amp; Backup</b>	
Sync Playback	4ch
Search Mode	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Decoding Capability	1 x 4K@30, 2 x 4MP@30, 4 x 1080p@30, 8 x 720p@30
<b>Network</b>	
Incoming Bandwidth	40 Mbps
Outgoing Bandwidth	64 Mbps
Interface	1 RJ-45 10M/100M self-adaptive Ethernet Interface
Network Function	SNMP,P2P, UPnP, NTP, DHCP, PPPoE
Max. User Access	128
Smartphone	Android & iOS
Interoperability	ONVIF
<b>Storage</b>	
Internal HDD SATA	1 SATA upto 8 TB
<b>External Interface</b>	
USB	Rear panel : 1 x USB2.0, Front panel : 1 x USB2.0
RS232	Supported
<b>Electrical</b>	
Power Supply	12V DC
Power Consumption	≤ 5 W( without HDD )
<b>Enviromental</b>	
Operating Temperature	-10°C ~ + 55°C ( +14°F ~ +131°F ), Humidity ≤ 90% RH(non-condensing)
<b>Construction</b>	
Material	Metal
Dimensions	260.0mm × 240.2mm ×43.6mm (10.2"× 9.5"×1.7")
Net Weight	≤ 1 Kg (2.2 lb )
<b>Certifications</b>	<b>CE, FCC, RoHS, UL &amp; BIS</b>
<b>Included Accessories</b>	<b>Power Supply, Mouse, HDD Connectors, Software CD, User Manual</b>

## Dimensions

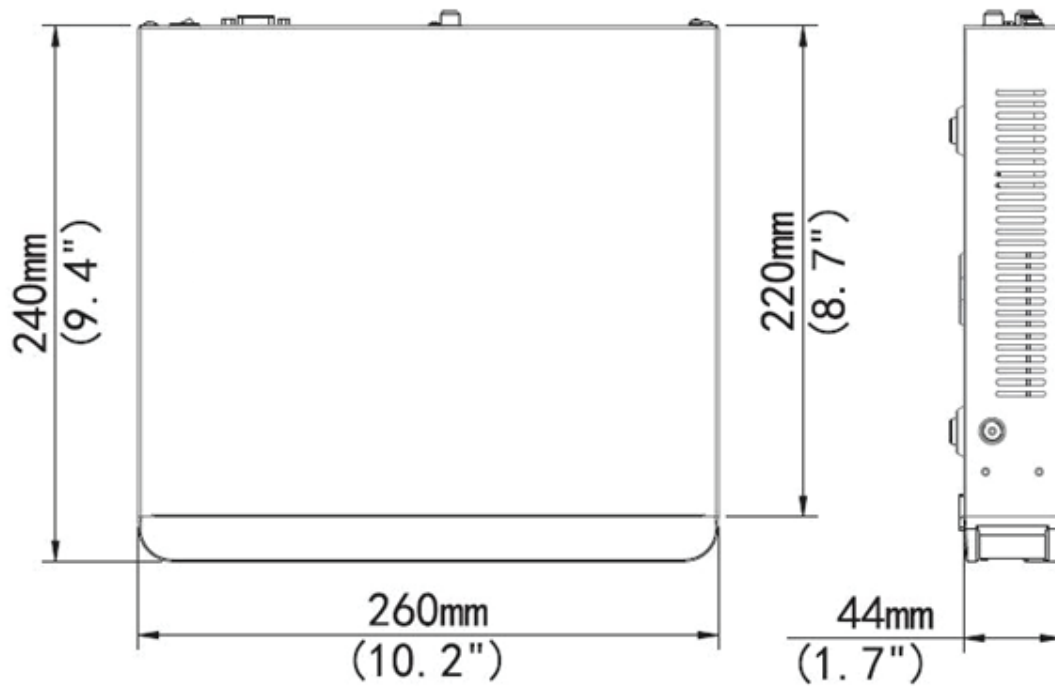

## Rear panel

