

SNVR-324H5 (SNVR-E0432)

32 CH NETWORK VIDEO RECORDER (ULTRA 4K)



ONVIF



4K
ULTRA HD



H.265




Product Highlights

- 32 ch IP Camera Input
- Third Party IP cameras (PoE) Supported with ONVIF Conformance
- Supports H.265/H.264 Video Formats
- Supports 12 Megapixels Resolution Recording
- Supports 2 ch-HDMI and 1 ch-VGA (HDMI2 at 4K resolutions)
- HDMI1/VGA & HDMI2 independent outputs provided
- I/O Bandwidth: 320/320 Mbps
- Supports 4 SATA upto 32 TB
- Various Fish eye dewarping modes for live view & playback for both web interface & GUI
- ANR Technology to enhance the storage reliability when the network is disconnected
- Supports Cloud upgrade

Specifications

Model Number	SNVR-324H5 (SNVR-E0432)
System	
Operating System	Embedded Linux
Audio & Video	
IP Camera Input	32ch
Two Way Talk	1ch , RCA
Display	
Interface	HDMI: 4K (3840x2160) /30Hz, 1920x1080p /60Hz,1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz
Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
OSD Menu	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
Video Detection & Alarm	
Trigger Events	Recording, PTZ, Tour, Alarm Out, Video Push, Email, Snapshot, Buzzer and Screen Tips
Video Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking
Alarm Input	16 ch
Relay Output	4 ch
Recording	
Compression	H.265, H.264
Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Bitrate	128 ~ 16384 Kbps
Playback & Backup	
Sync Playback	16 ch
Playback Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Backup Mode	Front panel: 1 x USB2.0 , Rear panel: 1 x USB2.0, 1 x USB3.0
Decoding Capability	1 x 4K@30, 2 x 4MP@30, 3 x 3MP@25, 4 x 1080P@30, 8 x 720P@30 16 x D1
Network	
Incoming Bandwidth	320 Mbps
Outgoing Bandwidth	320 Mbps
Interface	2 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface
Network Protocols	P2P, UPnP, NTP, DHCP, PPPoE
Max. User Access	128
Smartphone	Android & iOS
Interoperability	ONVIF
Storage	
Internal HDD SATA	4 SATA upto 32 TB
External Interface	
RS232	Supported
RS485	Supported
Electrical	
Power Supply	12V DC
Power Consumption	≤ 12 W(without HDD)
Enviromental	
Operating Temperature	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing)
Construction	
Material	Metal
Dimensions	440mm × 344mm× 44mm (17.3" × 13.5"×1.7")
Net Weight	≤ 3.14 Kg (6.92 lb)
Certifications	CE, FCC, RoHS, UL & BIS
Included Accessories	Power Supply, Mouse, HDD Connectors, Software CD, User Manual

Dimensions

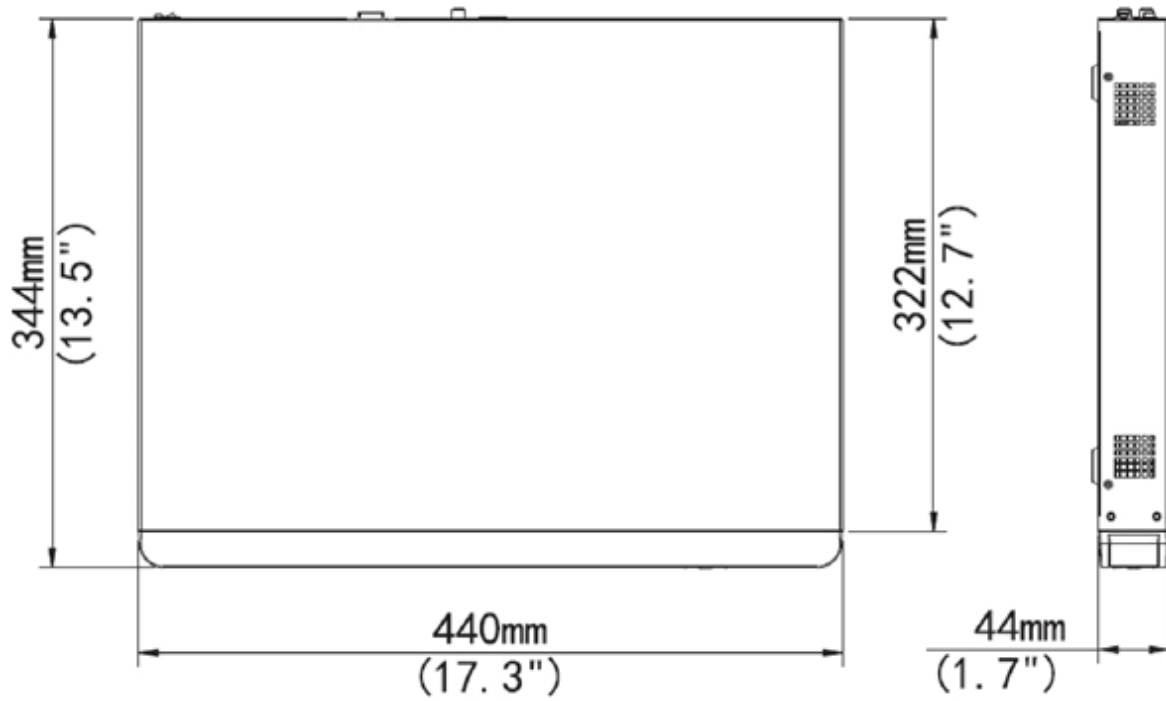

Rear panel

